

Cargo hose model certified by the Nippon Kaiji Kyokai



Authorization No.08SN1NH




Feature


- Cargo hose to be loaded on vessels
 - The available diameter is from 65A to 250A.
(Up to 20 meters is length can be produced.)
 - Design pressure: 1.0MPa
(Passed the pressure resistance test at 5.0 MPa in a prototype testing)
 - Design temperature: -163~+80°C
(Passed the pressure resistance test at 1.5MPa under low temperature of below -163°C in a prototype testing.)
 - Usable for LNG, LPG vessels.
 - Products for individual certification of different vessel grades can also be produced.
- ABS American Bureau of Shipping
 BV Bureau Veritas
 GL Germanischer Lloyd
 KR Korean Register of Shipping
 LR Lloyd's Register of Shipping
 DNV Det Norske Veritas
 CCS China Classification Society



■ Braid and tube rings of SUS316 and SUS316L are also available. Please contact us for details.

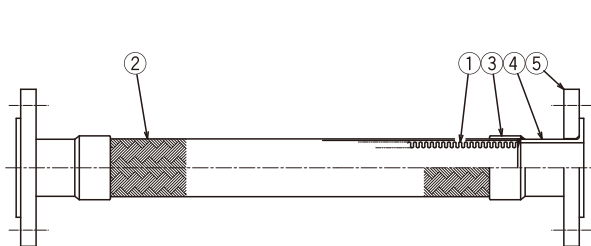

Item	Name	Material
1	Tube	SUS304·SUS316L
2	Braid	SUS304·SUS316·SUS316L
3	Tube Ring	SUS304·SUS316·SUS316L
4	Lap Joint	SUS304·SUS316·SUS316L, others
5	Loose flange	SUS304·SUS316·SUS316L, others

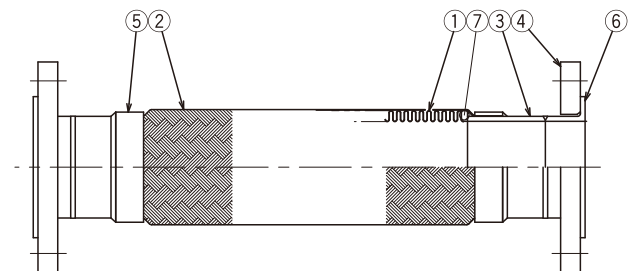

Item	Name	Material
1	Tube	SUS304·SUS316L
2	Braid	SUS304·SUS316·SUS316L
3	Pipe end	SUS304·SUS316·SUS316L, others
4	Loose flange	SUS304·SUS316·SUS316L, others
5	Fastening band	SUS304
6	Flange guard	SUS304·SUS316·SUS316L, others
7	Ring	SUS304